



Logic Signal Select

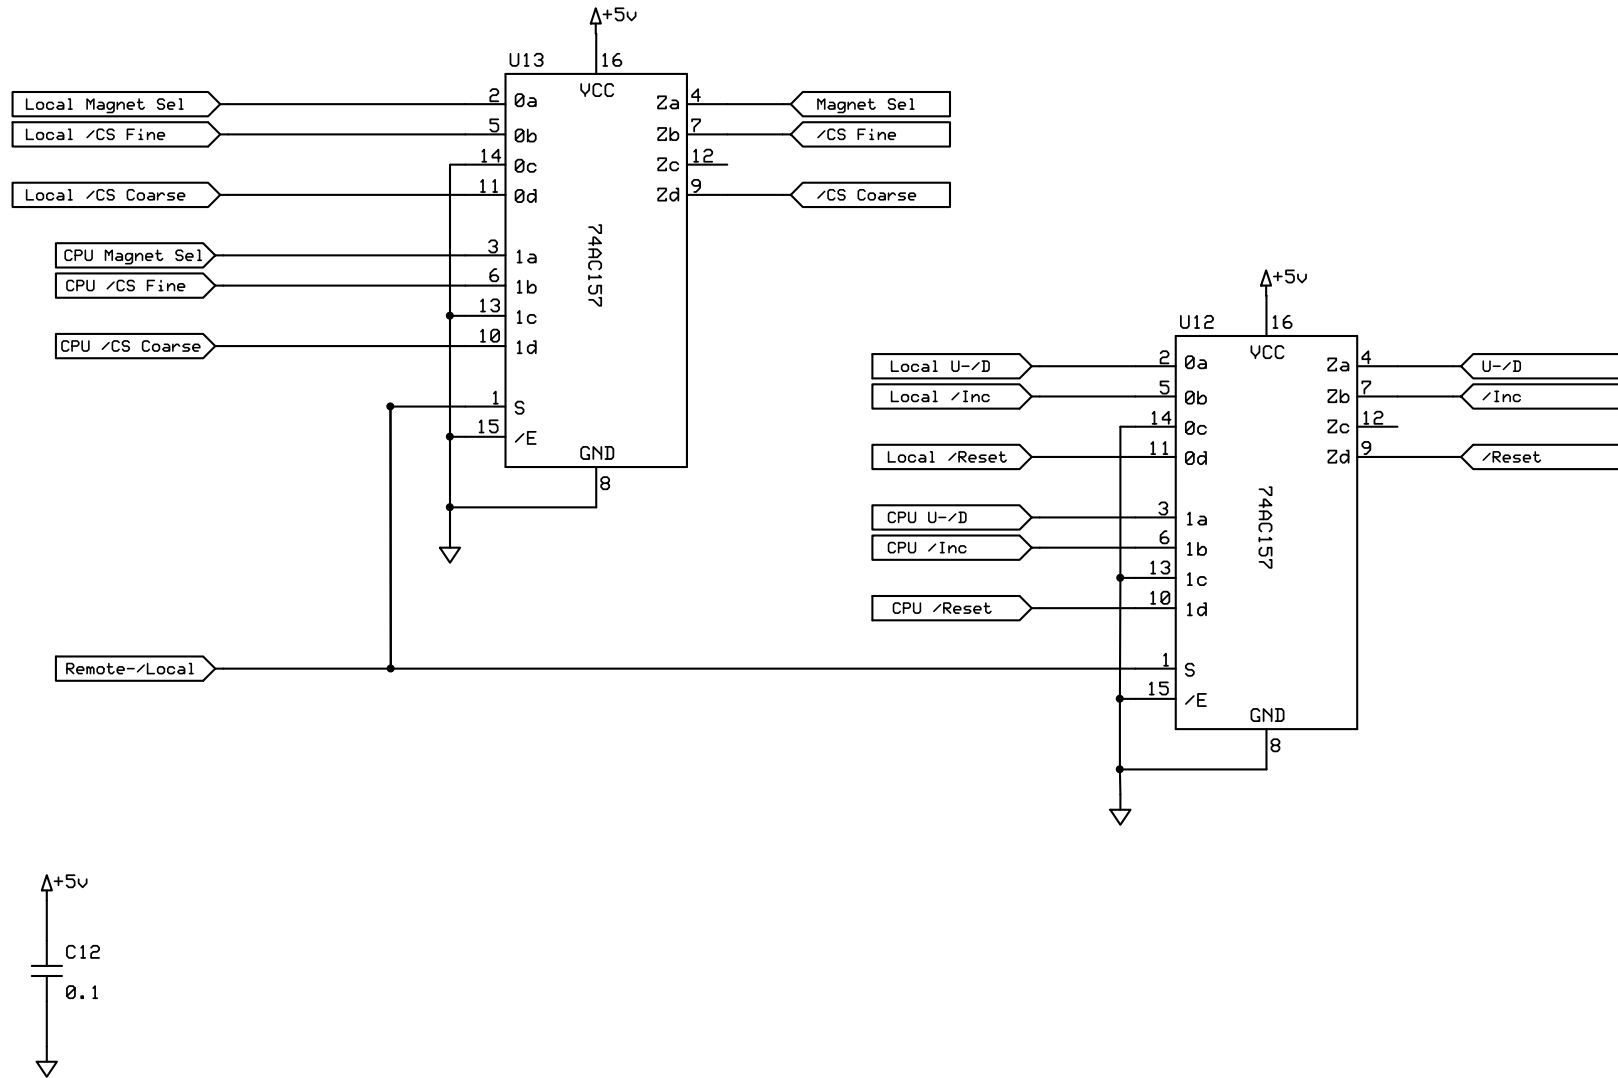

Manual Input Controls

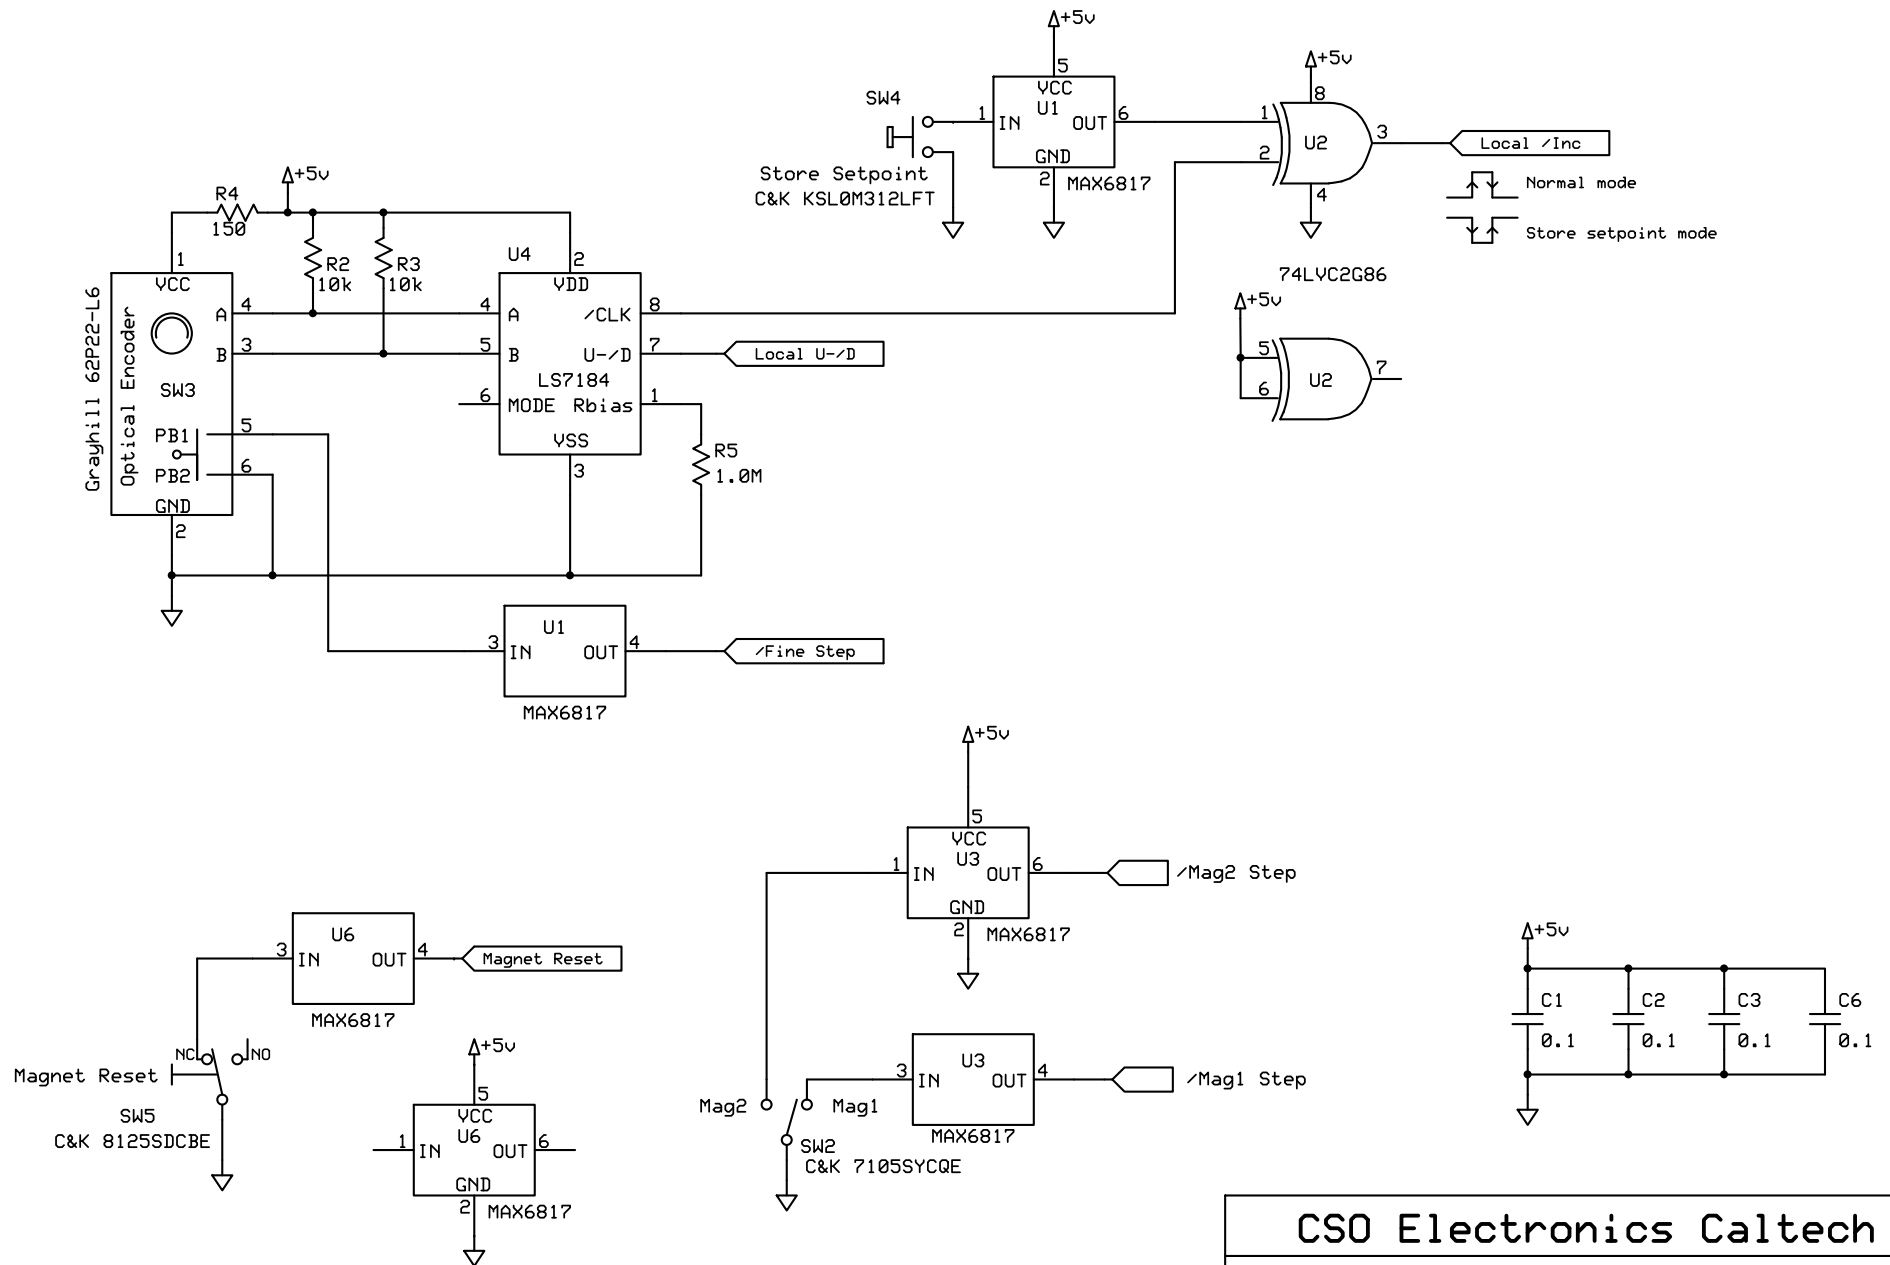

SW5 Note: NC and Common terminal connections may be reversed on PCB

CSO Electronics Caltech
Magnet Control Board


F. Rice

Rev 1.1
9/14/2009


Page 3 of 6

Panel Meters


Mag1 Panel Meter

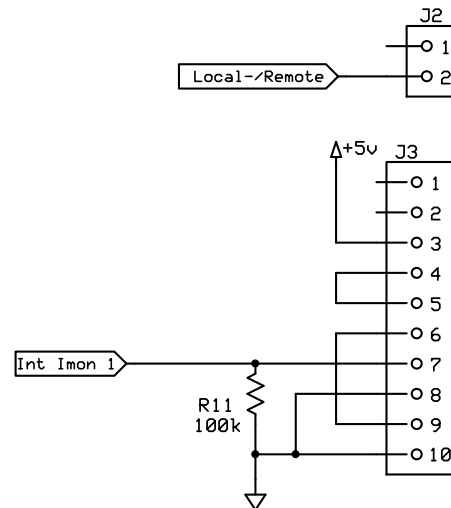

Mag2 Panel Meter

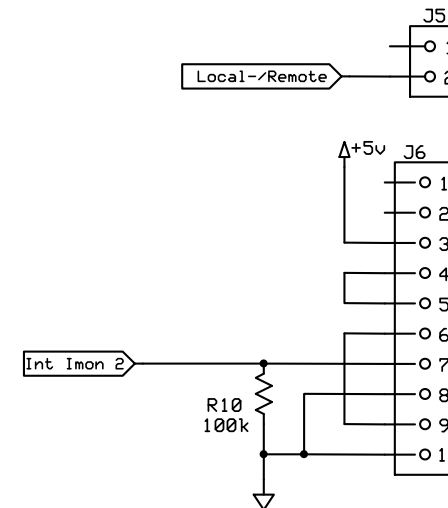

Backlight Timer Control

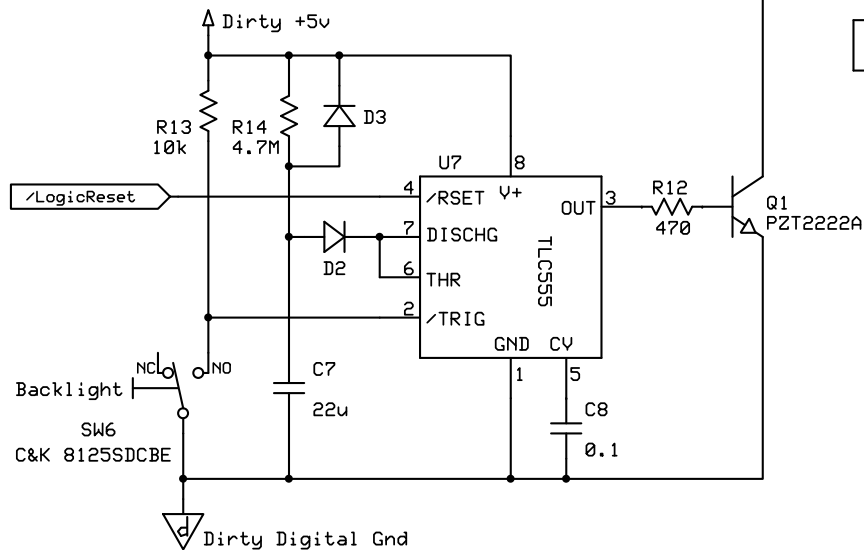

Connectors:

J2, J5: Molex/Waldom 44812-0020
J3, J6: Molex/Waldom 44812-0028
J4, J7: Molex/Waldom 44812-0022

CSO Electronics Caltech
Magnet Control Board


F. Rice

Rev 1.1
9/14/2009

Page 4 of 6

SW6 Note: NC and Common terminals may be tied together on PCB

Main Board Connectors and Power

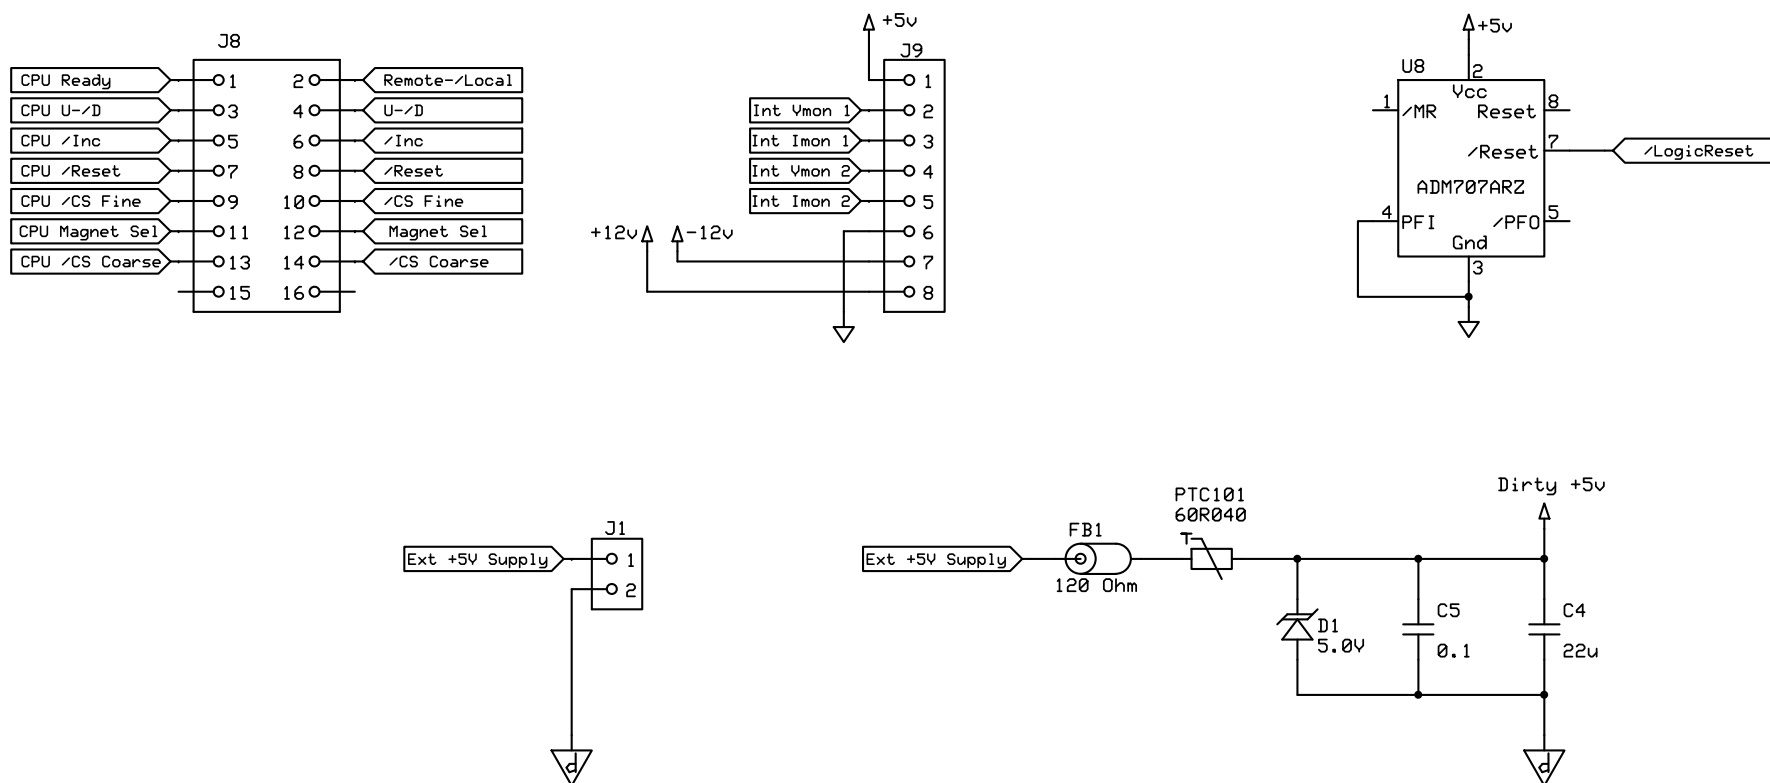

Connectors:

J1: 1x2 male vertical Hdr, 0.1" spacing, 0.230"-0.240" contact length, thru hole

J8: 2x8 male vertical Hdr, 0.1" spacing, 0.230"-0.240" contact length, thru hole

J9: 1x8 male vertical Hdr, 0.1" spacing, 0.230"-0.240" contact length, thru hole

CSO Electronics Caltech
Magnet Control Board

F. Rice

Rev 1.1
9/14/2009

Page 5 of 6

General Notes

Resistors

Unless otherwise specified, resistors are size 0805, 1/10W or 1/16W, and may be thick or thin film
Unless otherwise specified, actual value used may be a standard 5% or 1% value within 10% of value shown

Capacitors

0.1uF capacitors are X7R ceramic 10V (or higher), 20% (or better), size 0805
22uF capacitors may be X5R ceramic or low-ESR tantalum 10V (or higher), 20%, size B/3528/3216/1210/1206

Digital Panel Meters and Monitors

The digital panel meters should be Jewel BL-3x0302-01 (5V supply, 2V full scale, green 5V backlight)
The backlight timer provides approx. 2 minutes of backlight power

Diodes and Transistor

Diode D1 is silicon TVS 400W DO-214AC (Littelfuse SMAJ series or equivalent)
Diodes D2 and D3 are 1N4148W, case size SOD-323
LEDs are red (other colors ok), 10 mA, T-1 with 0.465" (12mm) standoffs (CML 5310F series)
Transistor is type PZT2222ACT, case style SOT-223

Circuit Board

The circuit board for this design is labeled "Magnet Control v1.1" with date 9/14/09
This design is compatible with Magnet Main board v1.0
The current monitor inputs should have gain = 10 Ohm (100mA → 1V); meter full scale reading is 199.9mA
PTC101 and all controls and LEDs mount on the back side of the board

CSO Electronics Caltech

Magnet Control Board

F. Rice

Rev 1.1

9/14/2009

Page 6 of 6